

HT5000UV SPECIFICATIONS

Model	HT5000UV
Printhead	Kyocera KJ4A
Quantity of printheads	8-10 pcs(Double rows)
Resolution	726*2400dpi
Draft	192m/h
Print speed	Production 140m/h
	Quality 108m/h
Max print width	5.0m
Max media thickness	2mm
Media type	Roll materials
Ink	Flexible UV ink
Ink color	C、M、Y、K (W as optional)
Machine size(L*W*H)	8.88*2.03*2.02M
Machine net weight	6300KG
Machine gross weight	8170KG
Power consumption	11.1KW(25A)
Power supply	400VAC, 50Hz 3P/N/PE
RIP support	Caldera
UV Curing	LED
Interface	High Speed PCIE
Environment	Separated workroom in good cleaning and ventilated condition, avoid direct sunlight Temperature: 18° C – 30° C(64° F-86° F) Constant Humidity: 30%-70%

HandTOP



HT5000UV

Create value for customers; be a world-leading manufacturer of smart digital printing machines.

- Diversified product configuration and application solution can match the different demand in advertising, decorating and other industries.
- Reliable stability combines the outstanding printing quality and speed performance.
- Top-level R&D team ensures prompt optimization and upgrade for new products and keep advanced technology in digital printing field.
- Strong worldwide after-sales service team quickly shoots your problem.
- High cost-value product brings you more business.

HandTOP Shenzhen HANDTOP Tech Co.,Ltd

Add:The Third Factory, NO.322 Yuanhu Road, Longgang District Shenzhen China.
Tel: 0755-2796 0460 Fax: 0755-2321 7841
E-mail: info-handtop@hanglorygroup.com
Http://www.handtopuv.com




HANGLORY GROUP



HT5000UV

Roll to Roll Printer


HT5000UV Roll to Roll Printer 5m width MEDIA AREA

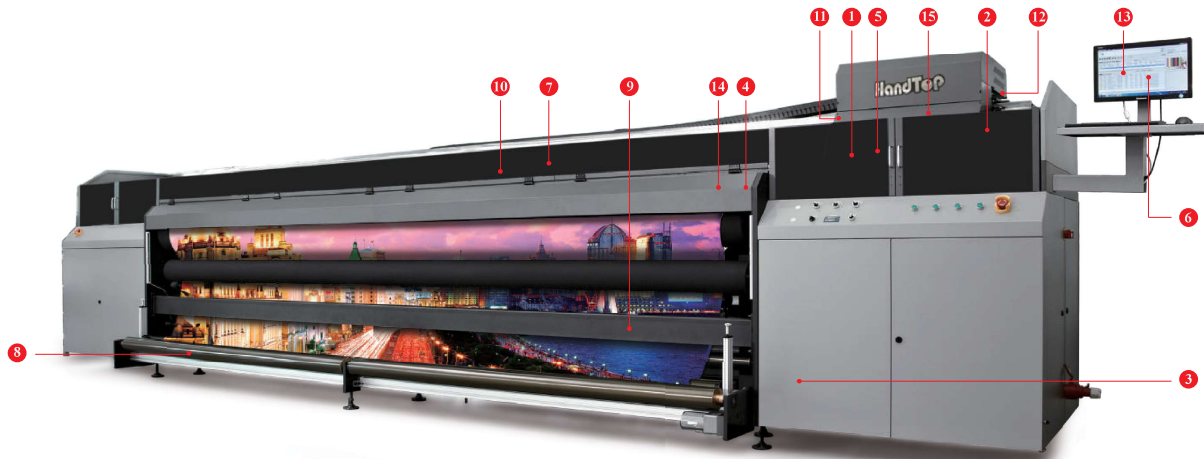

- 1 Auto media width detection system**
Automatically detects the width of media, flexible to print different size of media.
- 2 Static suppression(optional)**
Optional static suppression kit that eliminates static on the substrate.
- 3 Automatic negative pressure system**
Using PCB board to control negative pressure, set the negative pressure data from software.
- 4 Linear motor and metal raster**
High-tech linear motor gives more stable carriage movement, metal raster ensures the high precision in X direction movement.
- 5 Kyocera print heads(one head with 2 colors)**
Variable dots, true grey-scale imaging 4, 6 and 10pl
- 6 On board control module**
Rich functions, self-developed software, independent control module, efficient and convenient.
- 7 Function for mesh printing**
Special design with mesh kit, optional for the customers to print mesh material.
- 8 Double rollers feeding system**
Efficient and convenient system for loading the media.



Self-developed, customized driver and PCB board



Industrialized wiring make it more artistic

- 9 Multiple air cylinder supporter pinch roller**
Pinch roller with 8 air cylinder supporter which allow divided adjustment to ensure media transportation.
- 10 Water-cooling printing platform with adjustable suction zone**
Suitable for heat sensitive medias, make sure the media won't get distorted during the printing process and get better performance.
- 11 Auto height detection system, range of 0-30mm**
Automatically detects the height of media up to 30mm thickness and calibrates printhead distance for variable dot placement.
- 12 Water-cooling LED lamp**
Good curing performance with lower operating temperature and environment-friendly water-cooling LED system.
- 13 Top printing speed: up to 192m/hr**
Being engineered for high-quality printing and outputs up to 192m/hr with full blood capacity.
- 14 High-precision imported reducer**
With High-precision reducer at Y axis to increase the stepping accuracy for better high-end printing quality.
- 15 Automatic solenoid valve control of ink system**
The ink valve system is opened and closed automatically by solenoid valve control.

Kyocera KJ4A Printhead

Nozzle quality : 2656
Physical Resolution : 2*300dpi
Pico-litter : Variable 4-6-10pl
Max Operating Frequency : 30Khz
Effective Print Width : 112.35mm

