



Applications

- Channel letters
- Box signs
- Cove lighting
- Applications starting at 5" | 125 mm depth



Ordering Information

Part number	White Color Temperature	Module Spacing (mm)	Number of Modules		Nominal Light Output (lm) *		
			per Foot	per Meter	per Module	per Foot	per Meter
LS-U670-75K-B250-A	7500K	250	1.2	4	150	180	600
LS-U670-65K-B250-A	6500K	250	1.2	4	150	180	600
LS-U670-57K-B250-A	5700K	250	1.2	4	150	180	600
LS-U670-50K-B250-A	5000K	250	1.2	4	150	180	600
LS-U670-45K-B250-A	4500K	250	1.2	4	138	166	552
LS-U670-40K-B250-A	4000K	250	1.2	4	138	166	552
LS-U670-30K-B250-A	3000K	250	1.2	4	127	155	508
LS-U670-27K-B250-A	2700K	250	1.2	4	127	155	508

* ±10%






Product Ratings

Luminous Efficacy	121 lm/W @ 6500K
Wattage per Module	1.24 W Nominal 1.30 W Maximum
Input Voltage	12 V DC
Input Current	0.103 A/ module
Power Supply Loading	44 modules per 60W
Ingress Protection	IP68
Operating Temperature	-40°F to +140°F (-40°C to +60°C)
L70 Life time @ 60°C	50,000 hours
Warranty	5 Year limited

Luminous Intensity Distribution

600 Series Batwing Beam Pattern

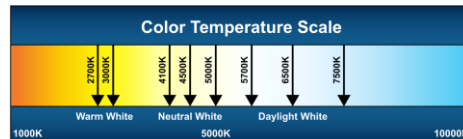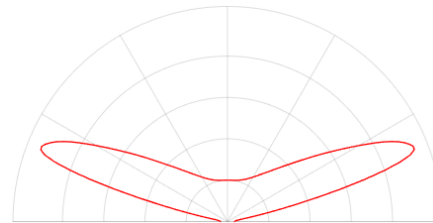

Shipping Information

Module Type	Packaging Quantity			Carton Weight	Box Dimensions			Carton Dimensions				
	per Bag	per Box	per Carton		W	D	H	W	D	H		
LS-U670-xxx-B250-A	100	500	2000	Modules								
	82	410.1	1640.4	Feet	46.1 lb	22.1	10.6	4.5	31.0	23.1	9.9	inch
	25	125	500	Meters	20.9 kg	560	270	115	788	588	252	mm

Layout Guide*

Channel Depth (inch)	Single Row		Multiple Rows	
	Max. Stroke	Module Spacing	Row Spacing	Module Spacing
4	13	9	9	9
5	17	9.8	13	9.8
6	20	9.8	16	9.8
7	19	9.8	18	9.8
8	17	9.8	17	9.8

Channel Depth (mm)	Single Row		Multiple Rows	
	Max. Stroke	Module Spacing	Row Spacing	Module Spacing
100	330	225	225	225
125	430	250	330	250
150	505	250	405	250
175	480	250	455	250
200	430	250	430	250


* Module spacing is defined to achieve a minimum of 600 lux for a single row or 800 lux for multiple rows at sign face (7328 white)

Power Supply Loading

	Module Type	LS-U670-xxx-B250-A			
		Power Supply	Max. # of Modules per Continuous String	Total # of Modules per Power Supply	Total # of Feet
UL CLASS 2	12 W	8	8	6.6	2
	15 W	11	11	9	2.8
	35 W	25	26	21.3	6.5
	60 W	43	44	36.1	11
	180 W*	43	132	108.3	33
UL CLASS 1	100 W	47	72	59.1	18
	150 W	47	109	89.4	27.3
	180 W	47	131	107.4	32.8
	220 W	47	160	131.2	40

Note: 1. The number of modules in each of the parallel strings should not exceed the specified maximum.
2. *3 – 60 Watt Channels

Dimensions

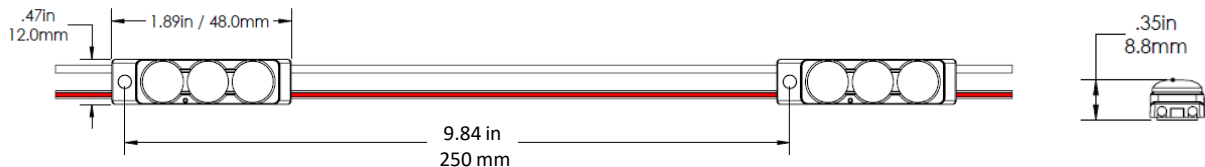

1. UL ONLY - These products are only suitable for connection to a UL rated Class 2 power source rated 12 Volt or less.
2. UL ONLY - These products are intended for use only when connected to a power source that complies with UL rated Class 2 voltage and energy limited circuit.
3. UL ONLY - When these units are connected to a UL rated Class 2 circuit, they are not to draw a total wattage of greater than the secondary or output rating of the UL rated Class 2 power supply.
4. These products may be secured in place in the end product by any means available.
5. These products are suitable for use in dry, damp, and wet locations. Not suitable for submersed applications.