

Technical Specifications

Dimensions (L*W*H)		Glory 1604: 12700 x 5590 x 3245 mm Glory 1604 + Stacker: 19560 x 5590 x 3245 mm Glory 1604 + 8 Meters Tunnel Dryer + Varnish + Stacker: 30635 x 5590 x 3245mm			
Productivity		Linear speed up to 150 m/min			
Substrate/Handling (W*L)		Types: Wide range of corrugated boards (coated, white, kraft etc.) Max. board size: 1600 x 2800 mm Mini. board size: 450 x 400 mm Thickness: 1.5-11 mm Handling: Lead-edge feeder, precise media positioning, vacuum suction, conveyor belt; All designed for reliable and high-quality printing.			
Printing		Technology: Single-pass, drop-on-demand, piezo inkjet technology. Print head: Industrial Kyocera (max.14 pcs per color) Ink type: Han FullColor® aqueous ink Width: Max. printing width 1512mm Ink color: Cyan, Magenta, Yellow, Black(CMYK) + (LC & LM optional) Drying: Infrared drying system			
Printing Modes	Resolution	600 x 400	600 x 600	600 x 900	600 x 1200
	Linear Speed	150m/min	100m/min	66m/min	50m/min
RIP		Software: 3rd party RIP Software Input formats: PDF, EPS, TIFF, JPEG and AI etc. Provide color solutions for various printing substrates			
Features		Warp detecting and warning system Automatic ink cost calculating function Remote defect diagnosis & system upgrades Production management system available			
Operating environment		Temperature: 22° to 30°C Humidity: 40%-80% RH (non-condensing) Power supply: 380V±3%/3 phase/50Hz Air supply: 6 bar (85 Psi) to 8.4 bar (120 Psi)			
Total Power		Glory1604: 175 Kw (Dryer 88 kw included) Priming Unit: 3 Kw	In Actual Production (Reference Only)	Glory1604: 35 Kw (IR Dryer Excluded) Priming Unit: 1.2 Kw	
		Tunnel Dryer: 180 Kw (Dryer 144 kw included) varnishing Unit: 75 Kw (Dryer 60 kw included) Stacker: 5 Kw		Tunnel Dryer: 25 Kw (IR Dryer Excluded) varnishing Unit: 9 Kw (IR Dryer Excluded) Stacker: 3 Kw	
Weight		Glory1604: 16600 kg Priming Unit: 900 kg Drying Unit: 9200 kg varnishing Unit: 3200 kg Stacker: 2300 kg			

Hanway



Glory 1604

Single-pass Corrugated Digital Inkjet Press



Shenzhen HANWAY Industrial Digital Equipment Co.,Ltd.
Add: The Third Factory, NO.322 Yuanhu Road, Longgang District Shenzhen China.
Tel: +86 0755-29375889
Fax: +86 0755-23217841
E-mail: info-hanway@hanglorygroup.com
Http://www.hanway-print.com



Hanway



Glory 1604

- Industrial robust design with the fastest production speed up to 150 m/min and High-Flexo like print quality.
- Digital printing technology brings you the experience of instantaneous response and seamless switch among multiple short-run orders.
- Applicable to all kinds of substrates including Kraft, Mottled White and Coated White.
- Water-based ink costs less and supports the wide range of packaging applications.




Lower ink consumption



Image Dimension: 569 x 373 mm
Image Pixel: 13440 x 8808
Resolution: 600 x 600 dpi



Better Graphic Designs

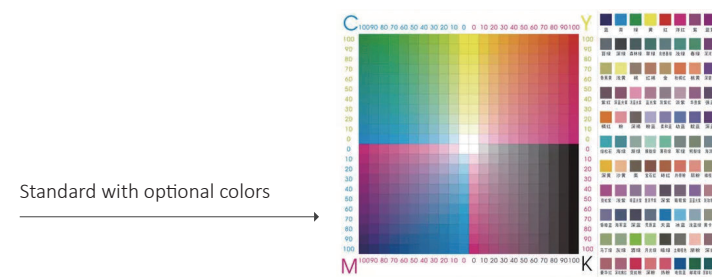

Customized & personalized designs



QR codes and bar codes



Higher Printing Quality



As high as 1200dpi in resolution, attributed to high-performance Kyocera printheads.

Quicker Job Changeover

